

Products Catalog

Summer 2002

Rev. 1.2 i

Index

- **Digital Multi Sound Sources (DIMUSS) .**
- **Do not Disturb (DND –02) .**
- **Meeting Room Timer (MRT-01) .**
- **Power Saver (PS –01) .**
- **Advanced Programmable Timer (MAT) .**
- **Wireless Waiter Caller (WWC –01) .**
- **Waiting Area Manager (WAM –01) .**

Digital Multi Sound Sources

DIMUSS

Sound Sources

Product Name : Digital Multi Sound System
Series : Dimuss 7000
Model : 7000
Part Number(s) : DM-7000-B, DM-7000-G
Description :
Six Time Sch Direct Sources + 1 CD+450 HR
Capacity.



See Also :Dimuss 7100, Dimuss 4100

Components: Dimuss 7000 Unit , 14" Monitor, KBD, Mouse, Power Cable, User Manual.

Available Colors:

Part no.	Color
DM-7000-B	Black
DM-7000-G	Beige

Specifications:

Dimension (W*H*D) mm	482*178*390
Weight	15 Kg
Power Consumption	80 Watt
Power	220 VAC
Sources	6 Prerecorded + 1 CD
Channels	0
Output	1Vpp, 0dp
Paging	N/A
Interrupt Signals	N/A

Requirements:

Item	Model
Power Amplifier	

Remarks

:_____

Product Name : Digital Multi Sound Source
 Series : Dimuss 4000
 Model : 4100
 Part Number(s) : DM-4100-B, DM-4100-G,
 DM-4110-B, DM-4110-G
 Description :
 3 Schd Sources/Matrix 8 CH +CD+ Paging +INT
 MESSAGES+450 HR Capacity



See Also :Dimuss 7100, Dimuss 7000

Components: Dimuss 4100 Unit , 14" Monitor, KBD, Mouse, Power Cable, User Manual.

Available Options:

Part no.	Color	Interrupts
DM-4100-B	Black	0
DM-4100-G	Biege	0
DM-4110-B	Black	5
DM-4110-G	Biege	5
DM-4120-B	Black	14
DM-4120-G	Biege	14

Specifications:

Dimension (W*H*D) mm	482*178*390
Weight	15 Kg
Power Consumption	80 Watt
Power	220 VAC
Sources	3 Prerecorded + 1 CD
Channels	8
Output	1Vpp, 0dp
Paging	External mic.
Interrupt Signals	14

Requirements:

Item	Model
Power Amplifier	

Remarks

: _____

Product Name : Digital Multi Sound Source
 Series : Dimuss 7000
 Model : 7100
 Part Number(s) : DM-7100-B, DM-7100-G,
 DM-7110-B, DM-7110-G
 DM-7120-B, DM-7120-G

Description :
 3 Schd Direct Sources + 3 Schd Sources/Matrix 8
 CH +CD+ Paging + INT MESSAGES+450 HR Capacity]

See Also :Dimuss 4100, Dimuss 7000



Components: Dimuss 7100 Unit , 14" Monitor, KBD, Mouse, Power Cable, User Manual.

Available Options:

Part no.	Color	Interrupts
DM-7100-B	Black	0
DM-7100-G	Beige	0
DM-7110-B	Black	5
DM-7110-G	Beige	5
DM-7120-B	Black	14
DM-7120-G	Beige	14

Specifications:

Dimension (W*H*D) mm	482*178*390
Weight	15 Kg
Power Consumption	80 Watt
Power	220 VAC
Sources	6 Prerecorded + 1 CD
Channels	8
Output	1Vpp, 0dp
Paging	External mic.
Interrupt Signals	14

Requirements:

Item	Model
Power Amplifier	

Remarks

: _____

Do not Disturb

DND -02

Hotels

Product Name : Control Unit
Series : Do not Disturb
Model : DDC-01
Part Number(s) : DD-DDC-01-X
Description :
Request Unit
Living style
Do not disturb and make up the room services
Indication Leds

See Also : Display Unit



Components: Control Unit and Installation Manual.

Available Colors:

Part no.	Colors
DD-DDC-01-B	Black
DD-DDC-01-W	White
DD-DDC-01-B	Brown

Specifications:

Dimension (W*H*D) mm	116*79*55
Weight	150g
Power Consumption	50mA
Brightness	25mC
Power	220 VAC
Face	Living

Requirements:

Item	Model
Display Unit	DDD-01

Remarks: _____

Product Name : Display Unit
Series : Do not disturb
Model : DDD-01
Part Number(s) : DD-DDD-01-X
Description :
Display Unit
Living style
Do not disturb and make up the room services
Indicated Bright Messages



See Also : Control Unit

Components: Display Unit, and Installation Manual.

Available Colors:

Part no.	Colors
DD-DDD-01-B	Black
DD-DDD-01-W	White
DD-DDD-01-B	Brown

Specifications:

Dimension (W*H*D) mm	116*79*50
Weight	150g
Power Consumption	200mA
Brightness	25mC
Face	Living

Requirements:

Item	Model
Control Unit	DDC-01

Remarks: _____

Meeting Room Timer

MRT-01

Timer

Product Name : Meeting Room Timer
Series : Meeting Room Timer
Model : MRT-01
Part Number(s) : MRT-01-W MRT-01-S
Description :
Two digits Timer
Red leds.
Up/Down Indicator for volume
Remote Control
10Meters for remote controlling
Audio Alarm
Wall/Stand mount



See Also :

Components: Timer Display Unit, Remote Control, Power Supply, and User Manual.

Available Mounting:

Part no.	Mounting
MRT-01-W	Wall mount
MRT-01-S	Stand mount

Specifications:

Dimension (W*H*D) mm	395*225*25
Weight	450g
Power Consumption	200mA
Brightness	25mC
Interface	Remote Control

Remarks: _____

Power Saver

PS -01

Hotels

Product Name : Compact Key Unit
 Series : Power Saver
 Model : CK-01
 Part Number(s) : PS-CK-01-W, PS-CK-01-B
 Description :
 Compact Key Unit
 Techni style
 In wall mount
 Optical Fiber Card



See Also : Power Unit

Components: Key Unit and Installation Manual.

Available Colors:

Part no.	Colors
PS-CK-01-W	White
PS-CK-01-B	Beige
PS-CK-01-FBL	Face Plate (Blue)
PS-CK-01-FWD	Face Plate (WOOD)

Specifications:


Dimension (W*H*D) mm	120*80*65
Weight	150g
Current Consumption	100mA
Power	12VDC
Face	Techni
Coating	Electrostatic
Temperature	0-55C
Humidity	10-90%
Wiring	30m-Shielded Cable 2+sh

Requirements:

Item	Model
Power Unit	PU-01

Remarks: _____

Product Name : Power Unit
 Series : Power Saver
 Model : PU-01
 Part Number(s) : PS-PU-01-xx-M, PS-PU-01-xx-N
 Description :
 Power Unit
 Wall Mount
 Power on delay 3min.
 Power off delay 45-60sec.

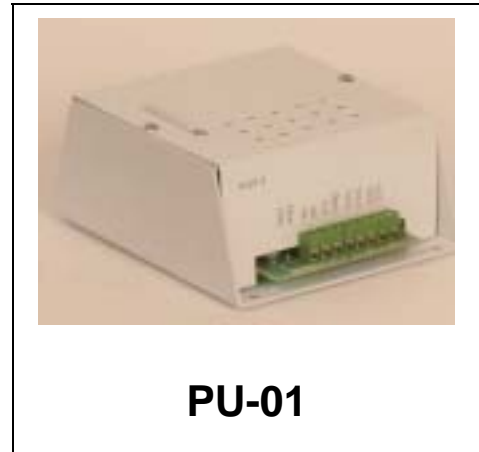

See Also : Key Unit

Components: Power Unit, and Installation Manual.

Available Options:

Part no.	OffDelay	OnDelay	MagneticSW
PS-PU-01-45-3-N	45sec.	3min.	None
PS-PU-01-45-3-M	45sec.	3min.	Exist.
PS-PU-01-15-3-N	15sec	3min	None
PS-PU-01-15-3-M	15sec	3min	Exist
PS-PU-01-45-0-N	45sec.	10sec	None
PS-PU-01-45-0-M	45sec.	10sec	Exist.
PS-PU-01-15-0-N	15sec	10sec	None
PS-PU-01-15-0-M	15sec	10sec	Exist

Specifications:


Dimension (W*H*D) mm	120*100*50
Weight	360g
Current Consumption	75mA
Power	220VAC
Mount	Wall Mount
Coating	Electrostatic
Temperature	0-55C
Humidity	10-90%
Load	3A-220VAC

Requirements:

Item	Model
Key Unit	CK-01

Remarks: _____

Product Name : Power Unit
 Series : Power Saver
 Model : PU-02
 Part Number(s) : PS-PU-02-xx-M, PS-PU-02-xx-N
 Description :
 Power Unit
 Wall Mount
 Power on delay 3min.
 Power off delay 45-60sec.
 Internal Contactor

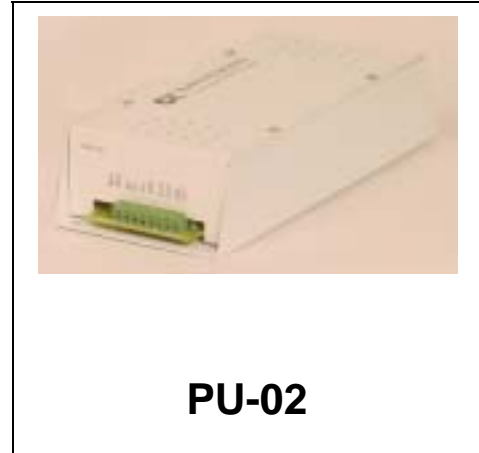

See Also : Key Unit

Components: Power Unit, and Installation Manual.

Available Options:

Part no.	OffDelay	OnDelay	MagneticSW
PS-PU-02-45-3-N	45sec.	3min.	None
PS-PU-02-45-3-M	45sec.	3min.	Exist.
PS-PU-02-15-3-N	15sec	3min	None
PS-PU-02-15-3-M	15sec	3min	Exist
PS-PU-02-45-0-N	45sec.	10sec	None
PS-PU-02-45-0-M	45sec.	10sec	Exist.
PS-PU-02-15-0-N	15sec	10sec	None
PS-PU-02-15-0-M	15sec	10sec	Exist

Specifications:

Dimension (W*H*D) mm	220*100*50
Weight	750g
Current Consumption	75mA
Power	220VAC
Mount	Wall Mount
Coating	Electrostatic
Temperature	0-55C
Humidity	10-90%
Load	25A-220VAC-3P

Requirements:

Item	Model
Key Unit	CK-01

Remarks: _____

Advanced Programmable Timer

MAT

Timer

Product Name : Programmable Timer
Series : Programmable Timer
Model : MAT-4
Part Number(s) : PT-MAT-4
Description :
Real Clock
96 Timer
Backup Battery
Schedule save
Able to connect with Siren or Relay
Volume Control for Siren option



See Also :

Components: Programmable Timer and User Manual.

Specifications:

Dimension (W*H*D) mm	280*120*80
Weight	1000g
Power Consumption	200mA
Brightness	15mC
Backup Battery Duration	24Hours Full operation

Remarks: _____

Wireless Waiter Caller

WWC -01

Waiter Caller

Product Name : Receiver Panel
Series : Wireless Waiter Caller
Model : WWR-01
Part Number(s) : WC-WWR-01
Description :
Receiver Panel
40 Tables
Seven Segment Display
Ability to monitor all tables at the same time
Wall mount



See Also :Pyramid unit

Components: Receiver Panel, Power Cable, Speaker, Charger and Installation Manual.

Specifications:

Dimension (W*H*D) mm	
Weight	2500 g
Power Consumption	40 Watt
Brightness	20 mC
Speaker	30 Watt

Remarks: _____

Product Name : Pyramid
Series : Wireless Waiter Caller
Model : WWP-01
Part Number(s) : WC-WWP-01
Description :
Transmitter Unit
Request service button
Flash indication led

See Also : Receiver Panel
Charger

**WWP-01**

Components: Pyramid, User Manual.

Specifications:

Dimension (W*L*H) mm	90*90*85
Weight	150g
Power Consumption	30mA
Brightness	800 mC

Remarks: _____

Waiting Area Manager

WAM –01

Queuing System

Product Name : Client Jumbo Display
 Series : Waiting Area Manager
 Model : WCD-02
 Part Number(s) : WM-WCD-02-W WM-WCD-02-R
 Description :
 Three digits, Red leds.



See Also :Terminal Unit
 Control Unit
 Customer Request Unit

Components: Client Display Unit, Connection Cable, and Installation Manual.

Available Mounting:

Part no.	Mounting
WM-WCD-02-W	Wall mount
WM-WCD-02-R	Roof mount

Specifications:


Dimension (W*H*D) mm	395*225*25
Weight	450g
Power Consumption	200mA
Brightness	25mC
Interface	RS485

Requirements:

Item	Model
Operator Terminal	WT-01
Customer Request Unit	WCR-01
Control Unit	WCT16-01
PC	
Speakers (Option)	

Remarks: _____

Product Name : Operator Terminal
 Series : Waiting Area Manager
 Model : WT-01
 Part Number(s) : WM-WT-01
 Description :
 Auto Addressable
 Three digits
 Next, Send, Store, Recall services
 Magic Button

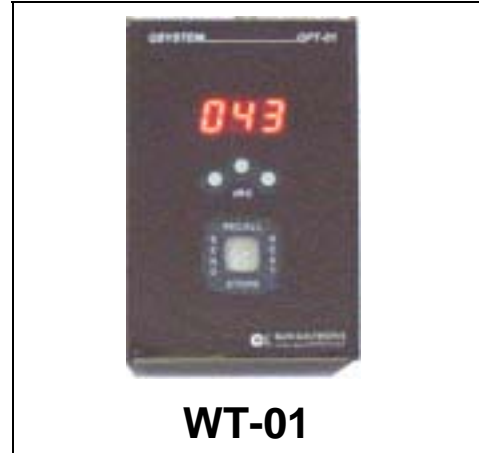

WT-01

See Also : Client Jumbo Display
 Control Unit
 Customer Request Unit

Components: Terminal Unit, Connection Cable, and User Manual.

Specifications:

Dimension (W*L*D) mm	90*140*70
Weight	250g
Power Consumption	100mA
Brightness	15mC
Interface	RS485

Requirements:

Item	Model
Client Jumbo Display	WCD-02
Customer Request Unit	WCR-01
Control Unit	WCT16-01
PC	
Speakers (Option)	

Remarks: _____

Product Name : Customer Request Unit
Series : Waiting Area Manager
Model : WCR-01
Part Number(s) : WM-WCR-01-G WM-WCR-01-B
Description :
Five Services
Wall mount

See Also : Client Jumbo Display
Control Unit
Operator Terminal



Components: Customer Unit, Connection Cable, and Installation Manual.

Available Colors:

Part no.	Colors
WM-WCR-01-G	Gray
WM-WCR-01-B	Black

Specifications:


Dimension (W*L*D) mm	90*140*25
Weight	250g
Power Consumption	100mA
Interface	RS485

Requirements:

Item	Model
Operator Terminal	WT-01
Client Jumbo Display	WCD-02
Control Unit	WCT16-01
PC	
Speakers (Option)	

Remarks: _____

Product Name : Control Unit
 Series : Waiting Area Manager
 Model : WCT16-01
 Part Number(s) : WM-WCT16-01
 Description :
 Control unit is the main unit in WAM system which connect all other units with and with PC.
 16 Ports, 7 units/port, 1A/port
 2 Audio Channels

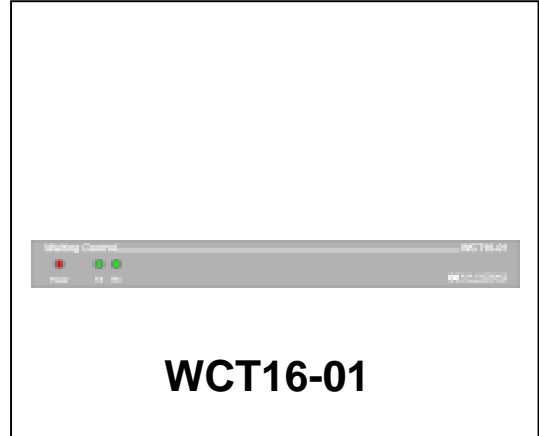

See Also : Client Display Unit
 Terminal Unit
 Customer Request Unit

Components: Control Unit, Power Cable, User and Installation Manual.

Available Audio Power:

Part no.	Color
WM-WCT16-5W	2*5Watt
WM-WCT16-20W	2*20Watt

Specifications:

Dimension (W*H*D) mm	482*44*250
Weight	1000g
Power Consumption	500mA
No. of Ports	16
Port Limit	7Units or 1A
Interface	RS232/RS485

Requirements:

Item	Model
Operator Terminal	WT-01
Customer Request Unit	WCR-01
Client Jumbo Display	WCD-02
PC	
Speakers (Option)	

Remarks: _____

Product Name : Receipt Printer
Series : Waiting Area Manager
Model : IDP-3421
Part Number(s) : IDP-3421
Description :
Receipt Printer
3.1 Line/sec.
Black and red colors
Auto-cutter
English Font

See Also : Client Display Unit
Terminal Unit
Customer Request Unit
Control Unit



Components: Printer, Power Cable, Serial cable, User and Installation Manual.

Specifications:

Power	220 VAC
Cutter	Auto
Interface	RS232 Serial

Requirements:

Item	Model
Operator Terminal	WT-01
Customer Request Unit	WCR-01
Client Jumbo Display	WCD-02
Control Unit	WCT16-01
PC	
Speakers (Option)	

Remarks: _____

Remarks :

1.
.....
.....
2.
.....
.....
3.
.....
.....
4.
.....
.....
5.
.....
.....
6.
.....
.....
7.
.....
.....
8.
.....
.....
9.
.....
.....